

Exhibit #4

[illegible]

AMA ENGINEERING
1415 OAKLAND BLVD., SUITE 201
WALNUT CREEK, CA 94598
TEL (925) 944-1888 FAX (925) 944-1887
WEB SITE: AMASOFTWARE.COM




PROJECT
RASSAI RESIDENCE
200 SYDNEY DRIVE,
ALAMO, CA 94507


SITE PLAN

DRAWN	A.A.
CHECKED	A.A.
DATE	12-11-2014
SCALE	AS INDICATED
JOB NO.	
SHEET	A-1
OF SHEETS	07



DRAWN A.A.	CHECKED A.A.	DATE 12-11-2014	SCALE AS INDICATED	JOB NO. A-2	SHEET OF SHEETS
---------------	-----------------	--------------------	-----------------------	----------------	--------------------

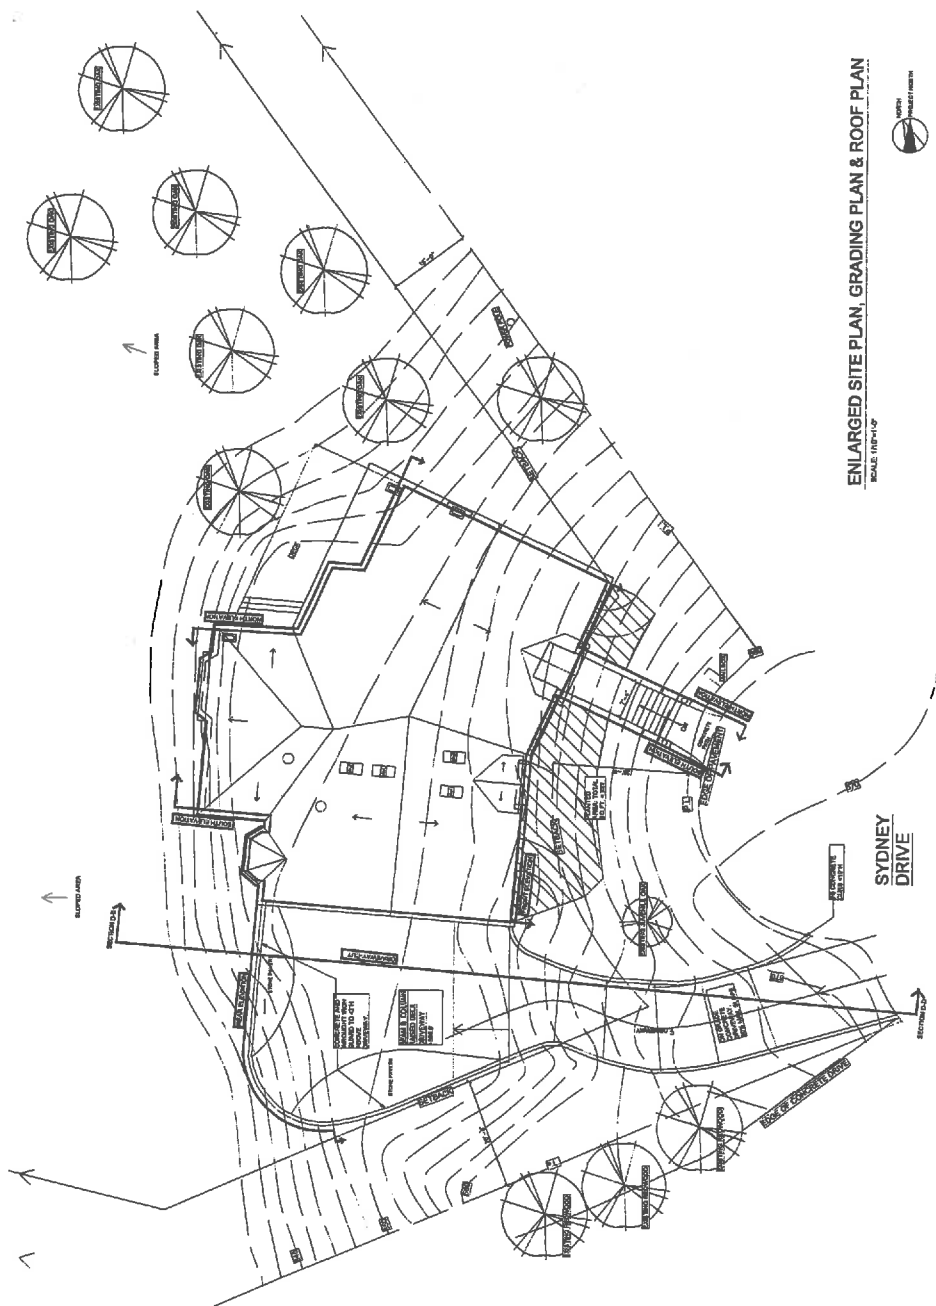

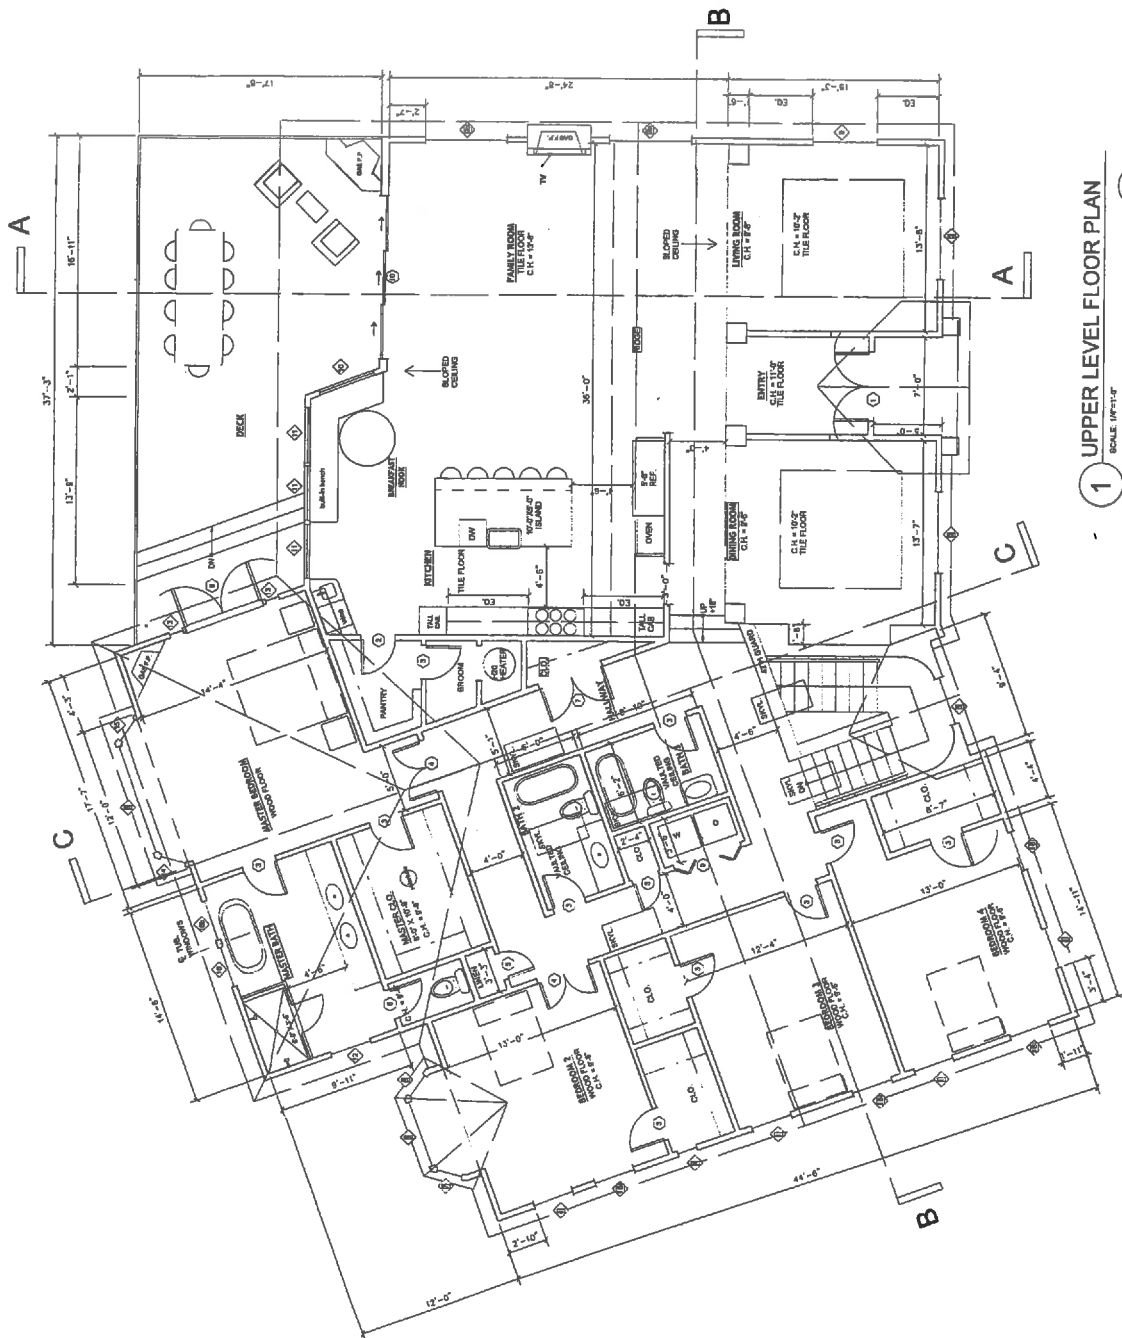

ELECTRICAL NOTES


1. HALF OR MORE OF INSTALLED WATTAGE OF LUMINAIRES IN ALL NON-RESIDENTIAL KITCHEN FIXTURES TO BE SWITCHED SEPARATELY FROM FLUORESCENT OR LED FIXTURES.
2. LUMINAIRES IN ALL OTHER ROOMS SHALL BE FLUORESCENT OR LED. LUMINAIRES SHALL BE INSTALLED AT AN OCCUPANT SENSOR, MOTION SENSOR OR DIMMER.
3. ALL IN RECEPTACLES IN KITCHEN AND BATHS TO BE GFCI.
4. SWITCHES AND DIMMERS TO BE LOCATED TO MATCH HEIGHT OF CONTROLS ON OTHERS AND DIMMERS.
5. VERIFY ALL IN RECEPTACLES (B) SERVICE.
6. VERIFY ALL DIMENSIONS IN FIELD.
7. SEE ELEVATIONS FOR ORIENTATION OF ELECTRICAL PLATES (HORIZONTAL/VERTICAL).
8. REVIEW ELECTRICAL LAYOUT WITH DESIGNER PRIOR TO INSTALLATION. VERIFY LOCATION OF ALL ELECTRICAL FIXTURES AND OUTLETS WITH DESIGNER PRIOR TO FINAL ORDER.
9. REVIEW MATERIALS SPECIFICATIONS WITH DESIGNER.
10. INSTALL ALL MATERIALS, EQUIPMENT, FIXTURES AND APPLIANCES IN CONFORMANCE WITH THE REQUIREMENTS OF THE NATIONAL ELECTRICAL CODE (NEC) AND THE REQUIREMENTS OF THE CODE.
11. FACE PLATES ADJACENT TO DOORS TO BE LOCATED 2" FROM TRIM.
12. SUBCONTRACTOR SHALL DETERMINE ELECTRICAL LOAD REQUIREMENTS.
13. APPLIANCES SHALL BE SUPPLIED BY A SEPARATE BRANCH CIRCUIT RATED FOR THE APPLIANCE SERVED.
14. RECEPTACLES FOR FIXED APPLIANCES SHALL BE ACCESSIBLE.
15. ALL IN OUTLETS TO REMAIN U.O.A. VERIFY OF LOCATION, INSTALL AS REQUIRED PER CODE.
16. IN ALL RECEPTACLES, USE AMPERE RECEPTACLE OUTLETS (NEMA 5-15R) WITH 15 AMPERE BREAKERS.
17. ALL BRANCH CIRCUITS SHALL BE SUPPLIED BY A SINGLE-PHASE, 15 AND 20 AMPERE OUTLETS INSTALLED IN SWELLING UNIT SHALL BE ARC-FAULT PROTECTED.


ELECTRICAL SYMBOLS (U.O.N.)

	1W LED WALL FIXTURE KELVIN TEMP: 2700, ON DIMMER
	FLUORESCENT CEILING FIXTURE
	INCANDESCENT PENDANT OR CEILING FIXTURE KELVIN TEMP: 2700, ON DIMMER
	LED CEILING FIXTURE KELVIN TEMP: 2700, ON DIMMER
	8\"/>
	4\"/>
	2\"/>
	1\"/>
	3-WAY SWITCH
	DIMMER SWITCH
	SWITCH VACANCY SENSOR
	LIGHT ON MOTION SENSOR
	DUPLEX OUTLET
	GROUND FAULT INTERRUPTER
	PANASONIC FAN ON TIMER

1 UPPER LEVEL LIGHTING AND ELECTRICAL PLAN

SCALE: 1/8\"/>

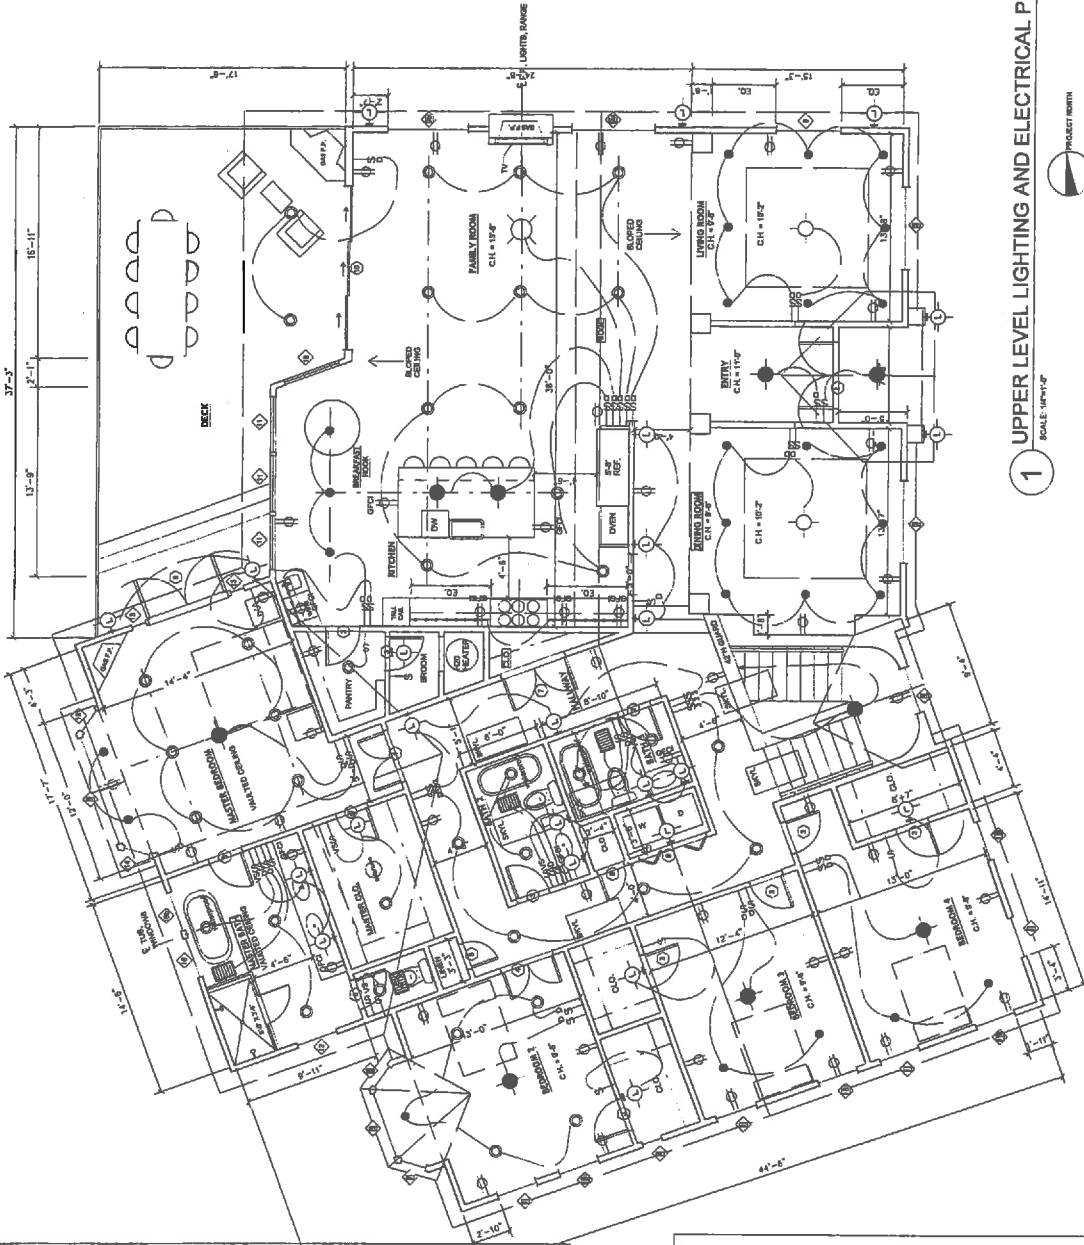

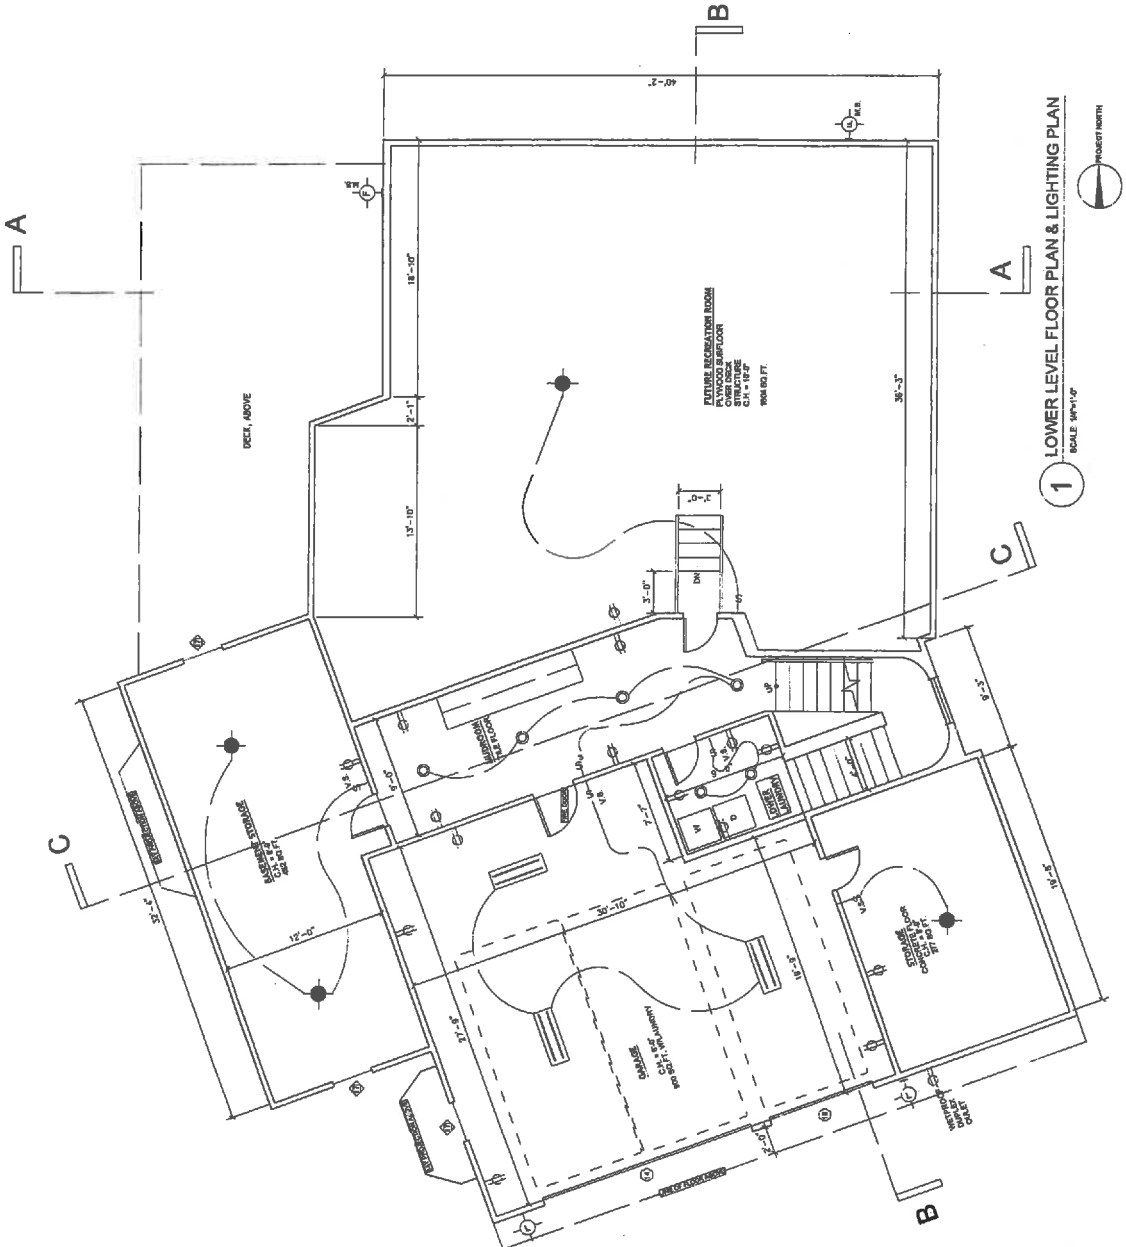

- ### ELECTRICAL NOTES

 1. HALF OR MORE OF INSTALLED WATTAGE OF LUMINAIRES IN ALL ROOMS SHALL BE INSTALLED IN THE FORM OF DIMMABLE FLUORESCENT OR LED FIXTURES. ALL DIMMABLE FLUORESCENT OR LED FIXTURES TO BE SWITCHED SEPARATELY FROM FLUORESCENT OR LED FIXTURES.
 2. LUMINAIRES IN ALL OTHER ROOMS SHALL BE FLUORESCENT OR LED FIXTURES. ALL DIMMABLE FLUORESCENT OR LED FIXTURES TO BE SWITCHED SEPARATELY FROM FLUORESCENT OR LED FIXTURES.
 3. ALL (N) RECEPTACLES IN KITCHEN AND BATHS TO BE OFTC.
 4. SWITCHES & DIMMERS TO BE LOCATED TO MATCH HEIGHT OF EXISTING SWITCHES AND DIMMERS.
 5. VERIFY ALL (R) ELECTRICAL INCLUDING (E) SERVICE.
 6. VERIFY ALL DIMENSIONS IN FIELD.
 7. SEE ELEVATIONS FOR ORIENTATION OF ELECTRICAL PLATES (HORIZONTAL/VERTICAL).
 8. REVIEW ELECTRICAL LAYOUT WITH DESIGNER PRIOR TO INSTALLATION.
 9. FUTURE LOCATION OF RECEPTACLES SHALL BE INDICATED BY A DASHED LINE.
 10. RECEPTACLES ADJACENT TO DOORS TO BE LOCATED 2' FROM TRIM.
 11. SUBCONTRACTOR SHALL DETERMINE ELECTRICAL LOAD REQUIREMENTS.
 12. APPLIANCES SHALL BE SUPPLIED BY A SEPARATE BRANCH CIRCUIT RATED FOR THE APPLIANCE SERVED.
 13. RECEPTACLES FOR FIXED APPLIANCES SHALL BE ACCESSIBLE.
 14. ALL (E) OUTLETS TO REMAIN U.O.N. VERIFY OPI LOCATION; INSTALL AS REQUIRED FOR CODE.
 15. ALL 120-VOLT, 15-20-AMPERE RECEPTACLE OUTLETS SHALL BE INSTALLED IN ACCORDANCE WITH THE REQUIREMENTS OF THE CODE.
 16. ALL 120-VOLT, 15-20-AMPERE RECEPTACLE OUTLETS SHALL BE INSTALLED IN ACCORDANCE WITH THE REQUIREMENTS OF THE CODE.
 17. ALL 120-VOLT, 15-20-AMPERE RECEPTACLE OUTLETS SHALL BE INSTALLED IN ACCORDANCE WITH THE REQUIREMENTS OF THE CODE.
 18. ALL 120-VOLT, 15-20-AMPERE RECEPTACLE OUTLETS SHALL BE INSTALLED IN ACCORDANCE WITH THE REQUIREMENTS OF THE CODE.
 19. ALL 120-VOLT, 15-20-AMPERE RECEPTACLE OUTLETS SHALL BE INSTALLED IN ACCORDANCE WITH THE REQUIREMENTS OF THE CODE.
 20. ALL 120-VOLT, 15-20-AMPERE RECEPTACLE OUTLETS SHALL BE INSTALLED IN ACCORDANCE WITH THE REQUIREMENTS OF THE CODE.
- ### ELECTRICAL SYMBOLS (U.O.N.)

10W LED WALL FIXTURE KELVIN TEMP: 2700 ON DIMMER	FLUORESCENT CEILING FIXTURE KELVIN TEMP: 2700 ON DIMMER	INCANDESCENT PENDANT OR CEILING FIXTURE KELVIN TEMP: 2700 ON DIMMER	LED CEILING FIXTURE KELVIN TEMP: 2700 ON DIMMER	8" RECESSED DOWNLIGHT LED WHITE HOUSING AND TRIM ON DIMMER KELVIN TEMP: 2700	LED UNDERCAB LIGHT 2700K	2-LIGHT T8 LED TUBE CEILING FIXTURE 40W	SWITCH	3-WAY SWITCH	DIMMER SWITCH	SWITCH W/NOVACANRY SENSOR	LIGHT ON MOTION SENSOR	DUPLEX OUTLET	GROUND FAULT INTERRUPTER	PANASONIC FAN ON TIMER
---	--	--	--	--	--------------------------	--	--------	--------------	---------------	---------------------------	------------------------	---------------	--------------------------	------------------------

DRAWN: A.A.	CHECKED: A.A.	DATE: 12-11-2014	MOLES:	JOB NO:-	SHEET A-5 OF SHEET#
----------------	------------------	---------------------	--------	----------	----------------------------------

SCALE: 1/4"=1'-0"



PROJECT
RABSAI RESIDENCE
200 SYDNEY DRIVE,
ALAMO, CA 94507

PROPOSED ELEVATIONS

DRAWN:	A.A.
CHECKED:	A.A.
DATE:	12-11-2014
SCALE:	AS INDICATED
JOB NO.:	
SHEET:	A-6
OF	SHEET



RASBAI RESIDENCE
200 SYDNEY DRIVE,
ALAMO, CA 94507

PROPOSED
SECTIONS

DRAWN A.A.	CHECKED A.A.	DATE 12-11-2014	SCALE AS INDICATED	JOB NO.	SHEET A-3 OF SHEETS
---------------	-----------------	--------------------	-----------------------	---------	----------------------------------

